

1127 Visual Alerter

High Performance LED Visual Alerter for Event Notification

The Algo 1127 Visual Alerter is an attractive high performing light that provides visual indication of in-use, ringing, message waiting and ACD caller in queue.

Supported telephones include: SIP, Nortel digital and IP Phones, IP Softphone 2050, Meridian Digital Centrex, and analog. Constructed with 18 high-intensity LEDs, the 1127 provides a softly diffused light that is highly visible in all directions. Relay inputs on the 1127 also permit activation via dry contact closure for a variety of other applications requiring visual indication.

The Visual Alerter can be located on a desktop, cubicle wall, above a computer monitor, or hard wired in a wall or ceiling-mount



application. Featuring four user-selectable flash patterns, the 1127 is offered in three different colors (green, blue, and red).



Typical Applications

Visual indication of a headset user on a call:

- > Receptionists
- > Call center agents
- > Employees in a cubicle environment

Visual ring indication:

- Night clubs
- Hospitals
- > Recording studios

Visual message waiting indication:

- > Retail
- > Schools
- > Floor supervisors

ACD queue activity:*

- Visual indication of caller in queue
- Visual indication of time parameter exceeded while in queue

^{*} Contact Algo for AuxBox special requirements.

1127 Visual Alerter



Ordering Information

1127R 1127B 1127G	Visual Indicator (red) without power supply Visual Indicator (blue) without power supply Visual Indicator (green) without power supply
1127PR 1127PB 1127PG	Visual Indicator (red) with power supply NA (117V 60Hz input 24Vdc 200mA output) Visual Indicator (blue) with power supply NA (117V 60Hz input 24Vdc 200mA output) Visual Indicator (green) with power supply NA (117V 60Hz input 24Vdc 200mA output)

Please contact Algo for ordering information outside of North America.

Specifications

LED output	18 high intensity low dispersion angle LEDs diffused		
Plug & Play connectors	2.1 mm ID jack input for power, 24 Vdc 80 mApolarity independent2.5 mm jack input for dry contact closure		
Terminal connections	Power, signal (dry contact or AUX SPKR from 1825 Duet Plus)		
Maximum wire distance	1,000 feet (300 m) using 24 gauge wire for remote power		
Dry contact detection	15 kOhms max, 1 mA 24V resistive		
Audio detection	3.3 Vrms 400-1200 Hz		
Mounting	Adhesive hook & loop tape or screws (supplied)		
Color options	Red, blue, and green		




For industrial environments or applications where wide area visual indication is required, substitute the 1127 Visual Alerter with Algo's

1126 Strobe Light

Web Links / Related Products

Visit the following links for in-depth product information, including User Guides, demos, and application diagrams.

1127 Visual Alerter	www.algosolutions.com/1127			
Related Products				
1126 Strobe Light	www.algosolutions.com/1126			
1825 Loud Ringer	www.algosolutions.com/1825			
4100 AuxBox	www.algosolutions.com/4100			
4102 Digital AuxBox	www.algosolutions.com/4102			
4105 Analog AuxBox	www.algosolutions.com/4105			
5006 Centrex AuxBox	www.algosolutions.com/5006			
8001 IP Alerter	www.algosolutions.com/8001			
8180 SIP Audio Alerter	www.algosolutions.com/8180			

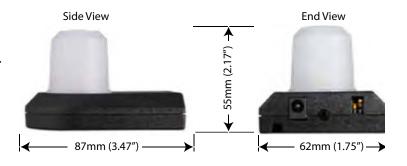

DC1127BR-14 March 2010 © Algo Communication Products Ltd. All rights reserved, Algo® is a registered trademark of Algo Communication Products Ltd. All other trademarks are the property of their respective owners.